### POLY CHAIN® GT CARBON™






Poly Chain® GT Carbon™, Gates most powerful synchronous belt, has been designed for optimum performance on high torque, low speed drives in any industrial application. This lightweight belt features increased power ratings of up to 30% higher than previous constructions, while maintaining the same long service life.

Poly Chain® GT Carbon™ belts operate on Poly Chain® GT sprockets and do not require any adaptation of existing GT2 applications.

Poly Chain® GT Carbon™ belt construction is based on innovative state-of-the-art design. The body and teeth of the belt are made of a unique polyurethane compound, making the belt tough and virtually immune to abrasion and chemical attack.

Poly Chain® GT Carbon™ belts make an excellent alternative to roller chains, requiring neither re-tensioning nor lubrication. Space-saving, weight-saving and money-saving, Poly Chain® GT Carbon™ drives offer a long and reliable service life.

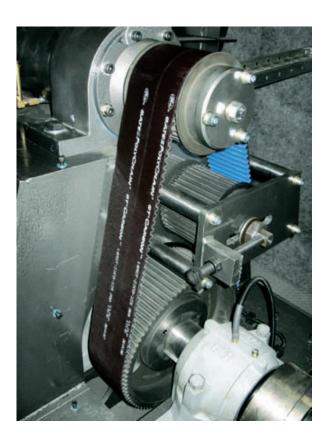

#### Identification

Blue tooth covering, with three part number on the back of the belt indicating pitch code, pitch length and width.


#### Construction

- Teeth and body are made of a lightweight polyurethane compound, specially blended for adhesion to the cords and fabric. This uniquely formulated polyurethane makes the belt tough and virtually immune to abrasion and chemicals.
- The carbon tensile cords provide extraordinary powercarrying capacity.
- Flex fatigue life of carbon is exceptional, and its high impact strength withstands shocks and surge loading.
- The fabric covering the teeth is highly resistant to oil, chemicals, pollutants, corrosion and abrasion. It is exceptionally durable and remains fully operational under extreme temperatures from -54°C up to +85°C.
- The fabric facing reduces friction with the pulley, thereby minimising temperature buildup.
- Easy rust-free wash down when used with Gates Stainless Steel or Nickel-Plated hardware.

#### **Advantages**

- Substantially increased power rating.
- · High efficiency positive drive.
- Maintenance-free: no lubrication or re-tensioning needed.
- Savings in space, weight and money.

Sections & nominal dimensions:				
	Pitch mm	T mm	B mm	
8MGT	8.0	3.4	5.9	
14MGT	14.0	6.0	10.2	





## POLY CHAIN® GT CARBON™

81	MGT				
Pitch: 8mm					
Pitch & Length Designation	Pitch Length mm	No. of Teeth			
8MGT-640	640	80			
8MGT-720	720	90			
8MGT-800	800	100			
8MGT-896	896	112			
8MGT-960	960	120			
8MGT-1000	1000	125			
8MGT-1040	1040	130			
8MGT-1120	1120	140			
8MGT-1200	1200	150			
8MGT-1224	1224	153			
8MGT-1280	1280	160			
8MGT-1440	1440	180			
8MGT-1600	1600	200			
8MGT-1760	1760	220			
8MGT-1792	1792	224			
8MGT-2000	2000	250			
8MGT-2200	2200	275			
8MGT-2240	2240	280			
8MGT-2400	2400	300			
8MGT-2520	2520	315			
8MGT-2600	2600	325			
8MGT-2800	2800	350			
8MGT-2840	2840	355			
8MGT-3048	3048	381			
8MGT-3200	3200	400			
8MGT-3280	3280	410			
8MGT-3600	3600	450			
8MGT-4000	4000	500			
8MGT-4400	4400	550			
8MGT-4480	4480	560			

Available in widths of	12mm,	21mm,
36mm, 62mm.		

14MGT					
Pitch: 14mm					
Pitch & Length Designation	Pitch Length mm	No. of Teeth			
14MGT-994	994	71			
14MGT-1120	1120	80			
14MGT-1190	1190	85			
14MGT-1260	1260	90			
14MGT-1400	1400	100			
14MGT-1568	1568	112			
14MGT-1610	1610	115			
14MGT-1750	1750	125			
14MGT-1890	1890	135			
14MGT-1960	1960	140			
14MGT-2100	2100	150			
14MGT-2240	2240	160			
14MGT-2310	2310	165			
14MGT-2380	2380	170			
14MGT-2450	2450	175			
14MGT-2520	2520	180			
14MGT-2590	2590	185			
14MGT-2660	2660	190			
14MGT-2800	2800	200			
14MGT-3136	3136	224			
14MGT-3304	3304	236			
14MGT-3360	3360	240			
14MGT-3500	3500	250			
14MGT-3850	3850	275			
14MGT-3920	3920	280			
14MGT-4326	4326	309			
14MGT-4410	4410	315			

Available in widths of 20mm, 37mm, 68mm, 90mm, 125mm.

# Poly Chain® GT Carbon ordering code is composed as follows:

40-12
- Pitch 8mm
- Pitch length (mm)
- Belt width (mm)